
LINE ISOLATOR MODEL LI-5260

PRODUCT DESCRIPTION AND INSTALLATION DETAILS

ACMA PERMIT

Design Two Thousand Pty Ltd ACMA Supplier Code N468

DESCRIPTION

The 2 wire Line Isolator LI-5260 is used for isolating equipment connected to leased telephone lines, providing dc isolation and an ac audio path. It can be used on two wire circuits.

The unit provides one two wire 600Ω isolating circuit in a small stand-alone enclosure. The audio input (equipment Tx) and outputs (line Rx) are provided on modular RJ45 sockets.

It is also available in a 10 port 19" rack mount version LI-5260BR.


The LI-5260 guards against dangerous voltages being passed from Customer Equipment to the telephone network. The LI-5260 also reduces the risk of electric shock to the customer and/or damages to Customer Equipment, should dangerous voltages be accidentally imposed on the telephone line.

The LI-5260 provides greater than 3500 Volts ac and greater than 5000 Volts dc isolation for more than one minute between the Equipment and Line.

The LI-5260 stand-alone enclosure is 110mm x 85mm x 50mm. An optional 2RU mounting bracket is available.


CONNECTION

Equipment (SK1)	Tx	Pair 1	Pins 4 & 5
Line (SK2)	Rx	Pair 1	Pins 4 & 5




Viewed from front of socket

FRONT PANEL DIAGRAM

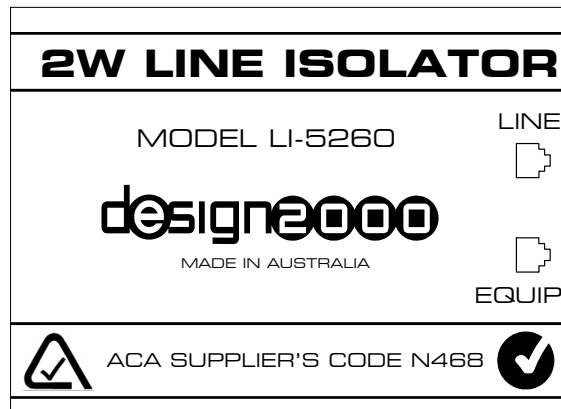

BLOCK DIAGRAM

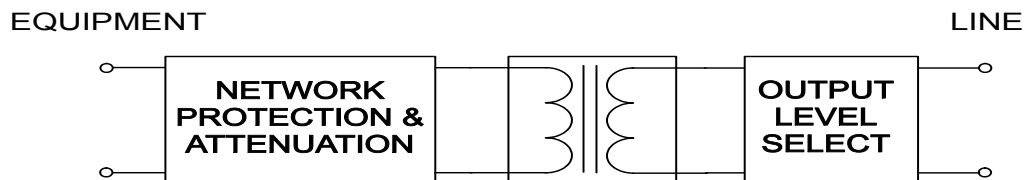

PART NUMBERS

LI-5260	2w Line Isolation Unit
PC-4796/2	2w Line Isolation Card
MB-4775/9	2RU Mounting Bracket

Designed and Manufactured in Australia

design2000

Est. 1968

Design Two Thousand Pty Ltd
Melbourne Australia

Telephone: 03 9758 5933
Facsimile: 03 9758 5560
Email: info@design2000.com.au
Web site: www.design2000.com.au



N468

